

# PULSAFEEDER<sup>®</sup>

## Contacting Head Water Meters

### Lead Free Meters

**Multi-Jet Meters**, 3/4 in. to 2 in., are designed for use in conjunction with a pulse timer to proportionally control pumps, valves etc. Typical applications include water treatment in cooling tower and boiler systems, water chlorination, car washes, and other industrial processes which require proportional control.

The Multi-Jet chamber of the water meter assures accuracy over a wide range of flows with low head loss. To prevent wear and maintain accuracy the load is equally distributed on the impeller.

The body of the water meter is constructed from bronze and factory tested to meet the AWWA C-708 Multi-Jet Meter accuracy specifications. The Multi-Jet Meter has a contact rating of 24Vdc or Vac at 20 mA.

**Turbine Meters**, 3in. to 6 in., operate continuously with exceptional accuracy. Each meter incorporates a highly efficient horizontal turbine that essentially floats on the water. The turbine is attached to a Tungsten steel shaft riding in Jewel bearings. The rotation of the turbine is transmitted through a magnetic drive to a sealed odometer register.

The cast-iron main case of the turbine meter is coated with a special anti-corrosive material. The register plate is constructed of ABS plastic to ensure long-term reliability. The turbine meter has a contact rating of 24Vdc or Vac at 100mA.

### Features

- Non-Resettable Mechanical Totalizer
- 3/4" to 6" Pipe Sizes
- Dry Top Multi-Jet Design

## Operating Benefits

- Accurate and Economical
- Rugged Construction
- Tolerates Low Quality Water




Lead Free  
Contacting Water Meter

Contacting Water Meter

## Aftermarket

- Metering Pumps
- Cooling Tower Controllers
- Boiler Controllers
- Pre-Engineered Systems



## Water Meters

Electrical Contacting Heads for Proportional Feed Systems

# Water Meters

## Specifications and Model Selection

### Lead Free Brass Contacting Water Meters - Cold Water

Lead Free Brass Contacting Water Meters - Cold Water				
	Code	Rating	Reference	MTR _
Select Water Meter Size	1 =	.625" x .75"	.25 - 20 GPM	
	3 =	1" NPT	.75 - 50 GPM	
	4 =	1.5" NPT	1.5 - 100 GPM	
	5 =	2" NPT	2 - 160 GPM	

Code	Rating	Gallons Per Contact (GPC)			
		3/4" x 5/8"	1"	1.5"	2"
00 =	Less Reed	X	X	X	
01 =	0.1 GPC	X	X		
02 =	0.25 GPC	X	X	X	
03 =	0.5 GPC	X			
04 =	1 GPC	X	X	X	X
07 =	10 GPC	X	X	X	X

#### Lead Free

3/4" - 2" Meters have male Epoxy Coated NPT Bronze Bodies with unions, rated for 150 PSI max, 105 F max.

### Brass Contacting Water Meters - Cold Water

Brass Contacting Water Meters - Cold Water				
	Code	Rating	Reference	MTR _
Select Water Meter Size	2 =	.75" NPT	.5 - 30 GPM	
	3 =	1" NPT	.75 - 50 GPM	
	4 =	1.5" NPT	1.5 - 100 GPM	
	5 =	2" NPT	2 - 160 GPM	

Code	Rating	Gallons Per Contact (GPC)			
		3/4"	1"	1.5"	2"
00 =	Less Reed	X	X		X
01 =	0.1 GPC	X			
03 =	0.5 GPC	X			
04 =	1 GPC	X	X	X	
06 =	5 GPC				X
07 =	10 GPC	X			

#### Standard Brass

3/4" - 2" Meters have male Epoxy Coated NPT Bronze Bodies with unions, rated for 150 PSI max, 105 F max.

### Turbine Contacting Water Meters - Cold Water

Turbine Contacting Water Meters - Cold Water				
	Code	Rating	Reference	MTR _
Select Water Meter Size	6 =	3" Flanged	440 GPM	
	7 =	4" Flanged	660 GPM	
	8 =	6" Flanged	1650 GPM	
				--


Code	Ratings	Gallons Per Contact		
		3"	4"	6"
10 =	100 GPC	X	X	X
13 =	1,000 GPC	X	X	X

3", 4" & 6" Meters have Epoxy Coated Ductile Iron Flanged Bodies, rated for 200 PSI max, 105 F max.




## Dimensions

### AWWA Standard Body Length

Size	A	B	C(NPSM)	D(NPT)	
5/8" x 3/4"	7.5	11.625	1	3/4	MTR100-A & G
3/4"	9	13.125	1	3/4	MTR200-A & G
1"	10.75	15.5	1 1/4	1	MTR300-A & G
1.5"	12.625	17.75	2	1.5	MTR400-A & G
2"	15.25	21	2 1/2	2	MTR500-A & G

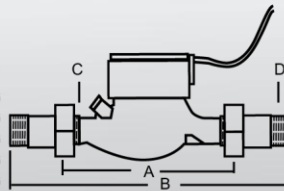

Size	A	B	Flanges
3"	8.86	10.87	150# ANSI
4"	9.84	11.26	150# ANSI
6"	11.81	13.60	150# ANSI

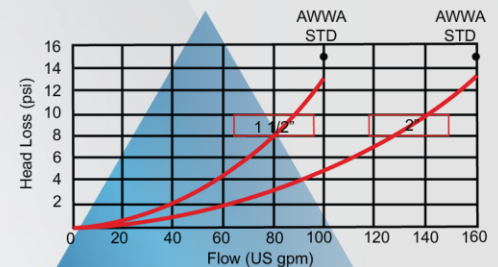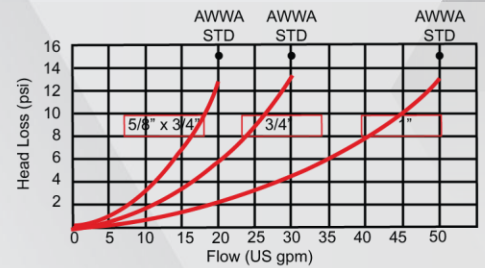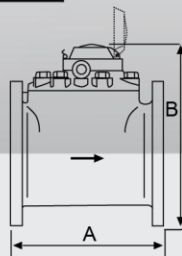

#### Flow Range (GPM)

	3"	4"	6"
Minimum	5.3	8	20
Max. Continuous	352	528	1320
Max. Intermittent	440	660	1650
Transition *	24	40	80

\* The flow rate at which accuracy changes from +/- 2% of reading (above Transition) to +/- 5% of reading (below Transition).

## Engineering Data

### Multi-Jet

<b>Materials</b>	
<b>Body:</b>	Cast Bronze
<b>Drive Magnet:</b>	Alnico
<b>Temperature</b>	
<b>Cold Water:</b>	105° F (40°C) max
<b>Pressure:</b>	150 psi Operating
<b>Pulse Output</b>	
<b>Sensor:</b>	Reed Switch
<b>Max Current:</b>	20 mA
<b>Max Voltage:</b>	24Vdc or Vac
<b>Cable Length:</b>	12' (4m) Standard (2000' max Run)
<b>Accuracy:</b>	+/- 1.5% of Reading

### Turbine

<b>Materials</b>	
<b>Body:</b>	Cast Iron, Epoxy Coating
<b>Register Plate:</b>	ABS Plastic
<b>Drive Magnet:</b>	Alnico
<b>Turbine:</b>	Plastic
<b>Turbine Shafts:</b>	Tungsten Steel
<b>Bearings:</b>	Jewel
<b>Temperature</b>	
<b>Cold Water:</b>	105° F (40°C) max
<b>Pressure:</b>	200 psi (14 bar) Operating
<b>Pulse Output</b>	
<b>Sensor:</b>	Reed Switch
<b>Max Current:</b>	100 mA
<b>Max Voltage:</b>	24Vdc or Vac
<b>Cable Length:</b>	12' (4m) Standard (2000' max Run)

Above Transition: +/- 2% of Reading\*  
Below Transition: +/- 5% of Reading\*

\*See Flow Range Table Above



27101 Airport Road  
Punta Gorda, FL 33982  
Phone: ++1(941) 575-3800  
Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

WM001 J14

