

# Lutz Drum Pump Sets



## Electric or Air driven Drum Pump Set for Acids and Base solutions

**Include:**

Motor B36 with 16 ft cord or MD2xL air motor, pump tube PP 39" sealless, high head impeller, Hastelloy C shaft, PP Barrel Adaptor, 3/4" PP Nozzle, 8' PVC Hose, Hose Clamps, Wall Hanger



**B36**



**MD2xL Air motor**

**Type of motor:**

**Technical Data:**

Motor:	120 V, 0.85 HP, ODP	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.4	2.8

Immersion depth:	39"	39"
Order-No.	0205-111-1	0205-111-2

Immersion depth:	47"	47"
Order-No.	0205-112-1	0205-112-2

Immersion depth:	55"	55"
Order-No.	0205-113-1	0205-113-2

\*Max. 760 CPS is with hand nozzle



## Electric or Air driven Drum Pump Set for Highly Corrosive Acids and Base solutions

**Include:**

Motor B55T-5 with 16 ft cord or MD2xL air motor, pump tube PVDF 39" sealless, high head impeller, Hastelloy C shaft, PP Barrel Adaptor, 1" PVDF Nozzle with swivel, 8' Chemical Hose, Hose Clamps, Wall Hanger



**B55T-5**



**MD2xL Air motor**

**Type of motor:**

**Technical Data:**

Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8

Immersion depth:	39"	39"
Order-No.	0205-201-1	0205-201-2

Immersion depth:	47"	47"
Order-No.	0205-202-1	0205-202-2

Immersion depth:	55"	55"
Order-No.	0205-203-1	0205-203-2

\*Max. 760 CPS is with hand nozzle



**Lutz Pumps, Inc.**

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334  
E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com

# Lutz Drum Pump Sets



## Electric or Air Driven Drum Pump Sets for Flammables, Hazardous Locations

**Include:**

Motor ME I 6 EX, Class I Group C&D, Class II Groups F&G (Explosion-proof) with 16 ft cord or MD2xL air motor, pump tube SS 39" sealless, high head impeller 1" SS Barrel Adaptor, 1" SS Nozzle with swivel, 8 ft. Conductive Chemical Tubing with Conductive Fittings, Ground & Bonding wires, Wall Hanger



**Type of motor:**

**ME I 6 (Ex)**

**MD2xL Air motor (Ex)**

**Technical Data:**

Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	750 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8

Immersion depth:	39"	39"
Order-No.	0205-411-1	0205-411-2

Immersion depth:	47"	47"
Order-No.	0205-412-1	0205-412-2

Immersion depth:	55"	55"
Order-No.	0205-413-1	0205-413-2

\*Max. 760 CPS is with hand nozzle



## Electric or Air Driven Drum Pump Sets for Thin-bodied Oils and Diesel Fuel

**Include:**

Motor B36 with 16 ft cord or MD2xL air motor, pump tube ALU 39" sealless, high head impeller, 316 stainless steel shaft, PP Barrel Adaptor, 1" aluminium Nozzle with swivel, 8' PVC Hose, Hose Clamps, Wall Hanger



**Type of motor:**

**B36**

**MD2xL Air motor**

**Technical Data:**

Motor:	120 V, 0.85 HP, ODP	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	15.9 GPM	15.9 GPM
Max. spec. Gravity:	1.4	2.8

Immersion depth:	39"	39"
Order-No.	0205-301-1	0205-301-2

Immersion depth:	47"	47"
Order-No.	0205-302-1	0205-302-2

Immersion depth:	55"	55"
Order-No.	0205-303-1	0205-303-2

\*Max. 760 CPS is with hand nozzle



**Lutz Pumps, Inc.**

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334  
 E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com

# Lutz Drum Pump Sets



## PURE Lutz Pump Set for FDA / 3A applications, non Ex application

**Include:**

Electric or air driven motor, 8 ft. Food Grade Hose 1", non-conductive Tri-clamp connections, 39" / 47" / 55", high-head ETFE impeller, 2" PP drum adapter, SS Nozzle / EPDM seal, with swivel, Wall hanger



Type of motor:	B55-T	MD2xL Air motor
<b>Technical Data:</b>		
Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	1000 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8
Immersion depth:	39"	39"
Order-No.	P206-411-1	P206-411-2
Immersion depth:	47"	47"
Order-No.	P206-412-1	P206-412-2
Immersion depth:	55"	55"
Order-No.	P206-413-1	P206-413-2




## PURE Lutz Pump Set for FDA / 3A applications, EX proof applications

**Include:**

Electric or air driven motor, 8 ft. Food Grade Hose 1", conductive, Tri-clamp conductive connections, 39" / 47" / 55", high-head ETFE impeller, 2" SS drum adapter, SS Nozzle / EPDM seal, with swivel, Wall hanger, Ground & Bonding wires



Type of motor:	ME I 6 (Ex)	MD2xL Air motor
<b>Technical Data:</b>		
Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	750 CPS	100,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8
Immersion depth:	39"	39"
Order-No.	P206-511-1	P206-511-2
Immersion depth:	47"	47"
Order-No.	P206-512-1	P206-512-2
Immersion depth:	55"	55"
Order-No.	P206-513-1	P206-513-2

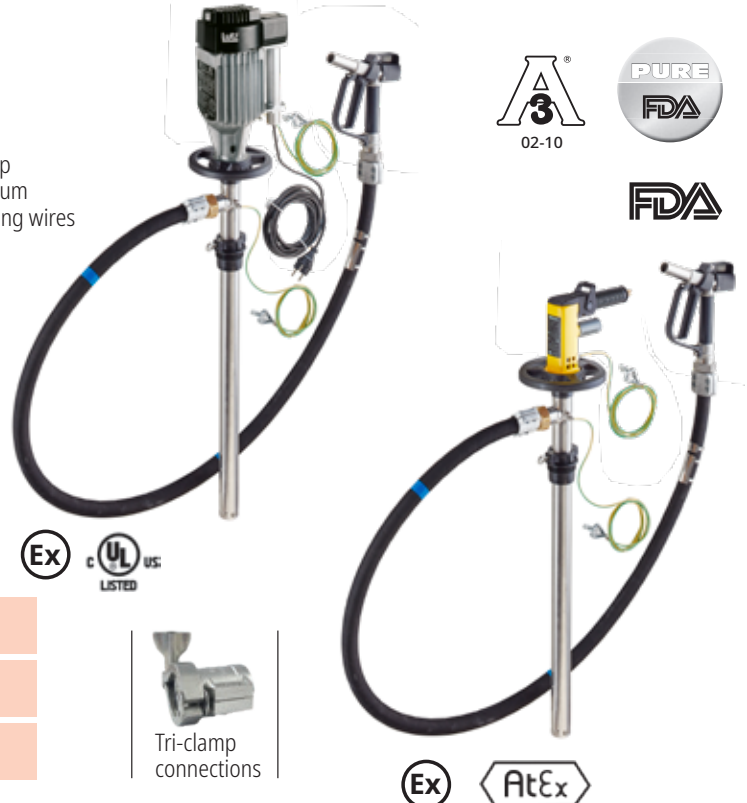

\*Max. 760 CPS is with hand nozzle

### Lutz Pumps, Inc.

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334  
 E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com